MAXIMUM THROUGHPUT WITH EXCELLENT RELIABILITY



The **DU2550-E** is a high-speed X-ray tube assembly, designed to **improve** workflow and accelerate image acquisition in heavily used nearby fluoroscopy and radiography systems. Its unique thermal management concept enables extraordinary patient throughput rates in combination with excellent reliability.

KEY BENEFITS

Improved workflow

- Up to 120 exposures per hour without overheating
- Enables 4 accelerations per minute


Convective air cooling

 No additional cooling devices (e.g. fans/chillers) needed



Specifications			DU2550-E
Maximum Tube Voltage [kV]			150
Focal Spots	Small Focus		0.6
	Large Focus		1.0
Nominal Anode Input Power [kW] (High Speed 150Hz)	Small Focus	equivalent anode input power 250 W: equivalent anode input power 20 W:	25 30
	Large Focus	equivalent anode input power 250 W: equivalent anode input power 20 W:	50 60
Nominal Continuous Input Power for Assembly [W]			200
Maximum Heat Content of Assembly [kHU]			2,046
Maximum Permissible Rate of Start-Stop Cycles per Minute (Please note: this rate cannot be applied continuously without reaching critical housing temperature)			4
Nominal Anode Rotational Speed [rpm]			9,000
Anode Angle			15°
HV Cable Connection			О3

The DU2550-E is part of the DU-E tube family, and has been specifically developed to serve nearby fluoroscopy and radiography needs. The DU-E X-ray tubes are designed to support workflows of 120 exposures per hour, for all kinds of radiographic applications. Even after eight hours of continual, consecutive examinations, fulfilling two exposures per minute, this tube assembly still reaches less than 90% of its heat storage capacity. This applies for radiographic chest examinations as well as for more demanding examination combinations which require more power, such as the pelvis or stitching images of the spine.

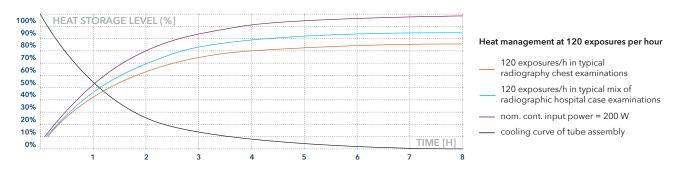

All rights are reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright holder.

Dunlee reserves the right to make changes in specification and/or to discontinue any product at anytime without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Contact us for further information.

Philips Medical Systems DMC GmbH
Tel.: +49 40 34971-1391
Röntgenstrasse 24 • 22335 Hamburg • Germany